




SEA BOX®

20' Flatpack Shelter

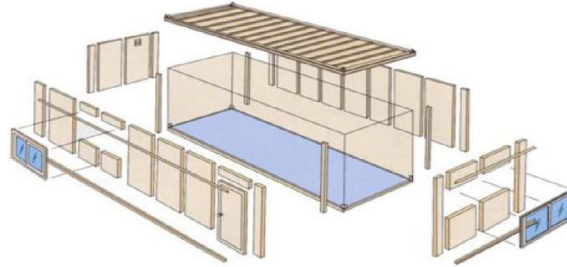

PRODUCT FEATURES

STANDARD FEATURES

- Collapsible Kit—can be stacked 4 high
- Constructed Unit, 8'6" high—can be stacked 2 high
- (1) set of forklift pockets
- Insulated wall panels: 7.38" H x 3.28' W x 4" D
 - (6) each, per long side
 - (2) each, per short side
 - Interchangeable panels
- (1) external door: 7' H x 3' W x 1.5" D furnished with cylinder lock, pre-painted steel frame
- (2) each, double layer windows (39" x 39")
 - Dual sliding
 - White PVC
 - 3mm thick glass
 - lockable
- Electrical components:
 - Distribution box, 110V single phase
 - (2) overhead lights
 - Flush mounted sockets (2) and (1) switch
- Units can be connected to create a larger structure
- Knockdown style structure
- 100mm Polyurethane Insulation (Density: 15 kg/m3)
- Heating and Cooling Unit (Frigidaire FAH12E) 230/280V, 12,000/10,000 BTU (cool/heat)



OPTIONAL FEATURES

- Connection Kits (create larger structures)

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 4 11/64"	8' 6"	7' 10 1/4"	8' 0"	7' 8 17/32"		
Metric	6,058	5,897	2,591	2,394	2,438	2,350		

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	4,189			
Kgs	1,900			

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

SB3640-6-4GGP
 20' Flatpack Shelter

040511-R00

ISO 9001:2008



CERTIFIED QUALITY MANAGEMENT SYSTEM