



# SEA BOX<sup>®</sup>

## 20' EMI Radar Shelter


**SB3883**  
20' EMI Radar Shelter



### PRODUCT FEATURES

#### STANDARD FEATURES

- Corrugated steel sides, and roof
- 14 gauge locking steel double end swing doors
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Smooth steel floor surface over wood floor
- Tie down steel lashing rings, 4000 lbs. cap. each
- (2) way laden fork lift pockets
- Continuous welded enclosure
- EMI gaskets or filters on all openings
- EMI man door on rear
- HVAC recessed into side wall

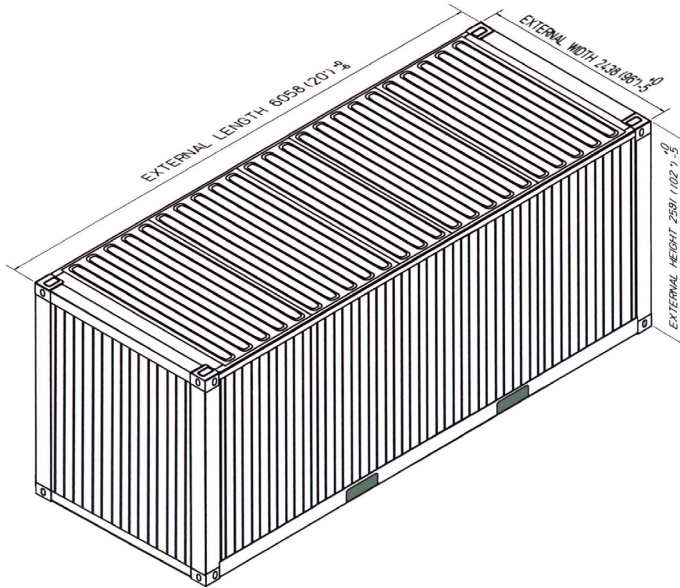

000000-R00

#### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

20' EMI Shelter	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 4 3/16"	8' 6"	7' 9 29/32"	8' 0"	7' 8 1/2"	7' 5 41/64"	7' 8 1/2"
Metric	6,058	5,898	2,591	2,385	2,438	2,350	2,277	2,350

20' EMI shelter	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	8,850	44,060	52,910	1,167 Cu.Ft.
Kgs	4,014	19,986	24,000	33 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY MANAGEMENT SYSTEM