





# SEA BOX®

## TRICON REFRIGERATED CARGO CONTAINER TYPE 1

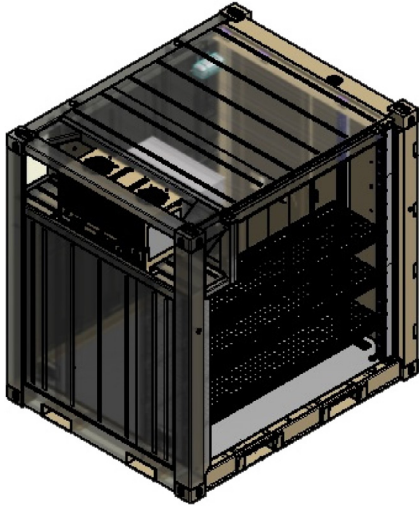

Isometric View  
Wall Removed For  
View of Interior

Isometric View  
Wall Removed For  
View of Interior

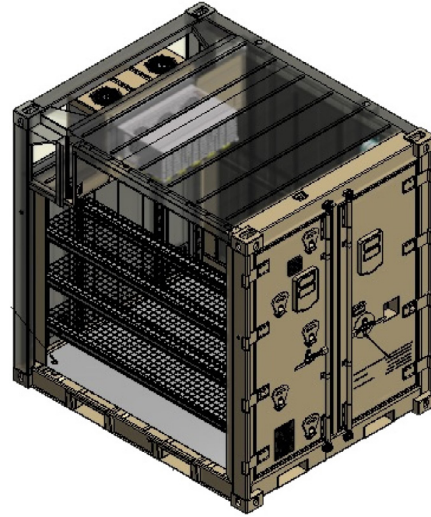

### PRODUCT FEATURES

#### STANDARD FEATURES

- NSF (National Sanitation Foundation) Certificate # D050856
- Certified NSF/ANSI STANDARD 7 Commercial Refrigerators and Storage Freezers
- Double swing doors with grip handle and Stainless Steel hardware
- Stainless Steel interior lining per NSF standards
- Heavy duty tread plate aluminum floor
- Four way fork lift pockets
- MRU-TQ1-404 (Mainstream) Refrigeration Unit, 120 single phase, 60 cycle. Power SO cable is 10m long with Hubble Connector HBL320P4W
- Internal lighting, 120 VAC, 100 watt bulb
- Cargo restraint system with (12) tie down points, 1,000 lbs. cap.
- Horizontal E-Track, 1 row per side—recessed in side wall panel
- Connecting couplers, (3) per Tricon
- Technical Manual holder, (2) each Interior size: 12" x 9" x 1.5"
- Floor drain, (4) each with plugs
- Custom data plates
- Vertical E-Track in road side wall
- Vertical E-Track post, removable type to be used with SS shelves, (4) each

- Food Grade Stainless Steel shelving, removable open deck design, 22" wide, 600 lbs. capacity per shelf (5) shelves per side
- Web straps and ratchets, (3) per shelf
- Connecting coupler storage bracket, (1) each, holds (3) connectors
- Emergency escape hatch
- 6 KW Gen set, Diesel, with Hubble Receptacle HBL320P4W
- Strip Curtains in sliding track across door
- (5) folding steps/hand hold for roof access, plus (1) on the roof
- Non-slip roof surface
- Decking and shoring beams, (20) each
- 31-day recording thermostat
- 7.5 gal. fuel tank with quick connect supply & drain lines
- Additional 20 ft. extended supply & drain lines
- Single phase transformer
- 12V battery
- Enclosed, lockable & vented compartment for operating system

#### OPTIONAL FEATURES

- Spare parts kit
- Low Solar Absorption (LSA) coating

#### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	6' 5 1/2"	5' 9 9/32"	8' 0"	6' 11 11/16"	8' 0"	7' 1/8"	6' 10 1/4"	5' 9 7/32"
<b>Metric</b>	1,969	1,760	2,438	2,126	2,438	2,137	2,089	1,758

	TARE WEIGHT w/ MACHINE	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY DRY FREIGHT	CUBIC CAPACITY REEFER CARGO	THERMAL LEAKAGE = U MAX @ 10°C MEAN TEMP
<b>Lbs</b>	5,100	4,900	10,000	293 Cu. Ft.	275.6 Cu. Ft.	7.98 Kcal/hr ° C
<b>Kgs</b>	2,313	2,223	4,536	8.3 Cu. M.	7.8 Cu. M.	6.4 Cu. M./hr @ 25.4 mm of WP

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

**SB531-0-DND-TYPE1**  
 Tricon Refrigerated Cargo Container



022212-R01

# SEA BOX

ISO 9001:2008  
CERTIFIED  
QUALITY SYSTEM