




## 40' Workshop Shelter (TYPE 6)

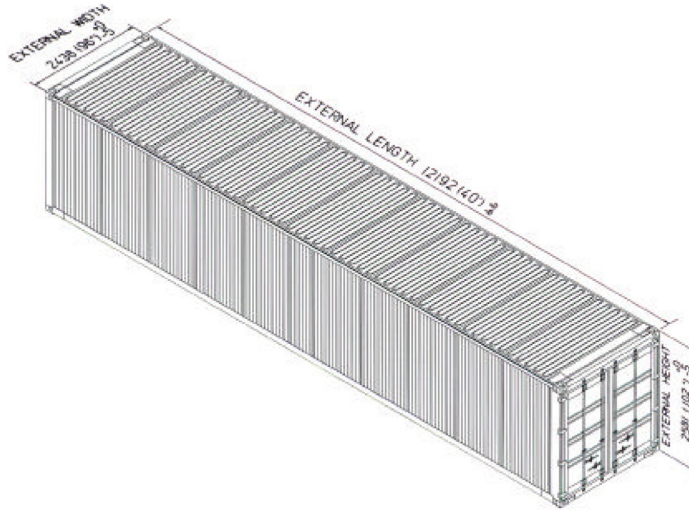

**SB6416**  
40' Workshop Shelter (TYPE 6)

### PRODUCT FEATURES

#### STANDARD FEATURES

- Corrugated steel sides, and roof
- 14 gauge locking steel double end swing doors
- Tie-down steel lashing rings, 4000 lbs. cap. each
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs. per 44 square inches
- Vents, (2) each



000000-R00

#### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	40' 0"	39' 5 5/8"	8' 6"	7' 10 1/4"	8' 0"	7' 8 1/2"	7' 5 41/64"	7' 8 1/2"
<b>Metric</b>	12,192	12,030	2,591	2,394	2,438	2,350	2,277	2,350

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	12,400	54,800	67,200	2,390 Cu. Ft.
<b>Kgs</b>	5,623	24,857	30,480	67.7 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P  
**GSA Advantage!**