



SEA BOX[®]


Double Doors One Side (Type 1) Tricon Dry Freight ISO Cargo Container

SB821-0-C
Double Doors One Side (Type 1)
Tricon Dry Freight ISO Cargo Container

PRODUCT FEATURES

STANDARD FEATURES

- Swing doors on one side (Type 1)
- Corrugated steel sides & roof
- Heavy duty steel floor
- (4) way fork lift pockets
- Wall tie down steel lashing rings, 4,000 lbs. cap. Each (20) total
- Front corner post tie downs, (10) total
- Door corner post tie downs, (10) total = restraint system shoring slot will support 2" x 6" lumber
- Vents, (2) each
- Adjustable shelving brackets: (5) sets = (10) Vertical E-Track sections total, weld on 4" center for 1,000 lbs. cap. Pull test for tie down fittings
- Manifest Box, (2) each
- Technical Manual
- UID Labels
- Performance purchase description # ATPD2298A
- The Natick Notch is 8 bottom rail locations
- Military Standard 595B 34094 CARC GREEN or 33446 CARC TAN exterior paint

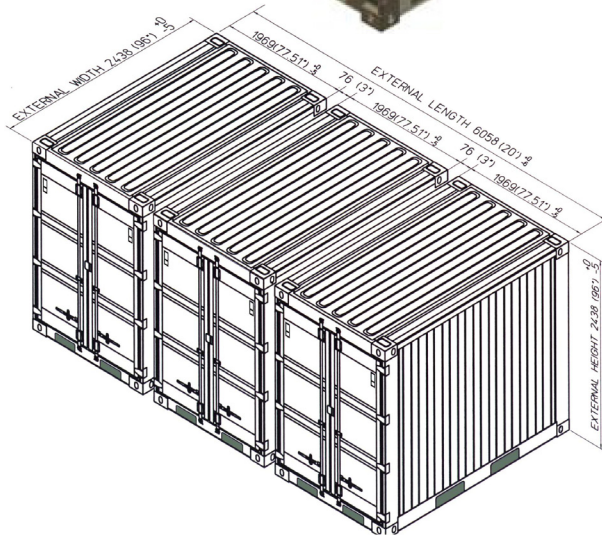

OPTIONAL FEATURES

- Decking & Shoring beams
- Metal Transverse shelves
- Closeable Vents
- 2" pipe coupling with plug for power entry
- Tie down fitting in E-Track, (8) each
- Tie down recessed in the floor, (4) each

NSN #: 8145-01-527-2878

040511-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	6' 5 1/2"	6' 3 5/16"	8' 0"	7' 5 1/64"	8' 0"	7' 7 23/32"	7' 1 3/64"	6' 1 45/64"
Metric	1,969	1,913	2,438	2,261	2,438	2,330	2,160	1,872

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	2,580	12,320	14,900	356 Cu. Ft.
Kgs	1,170	5,590	6,760	10.08 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM