




SEA BOX®

Double Doors Both Ends (Type 2) Bicon Dry Freight ISO Cargo Container

SB842.0-CT
Double Doors Both Ends (Type 2)
Bicon Dry Freight ISO Cargo Container

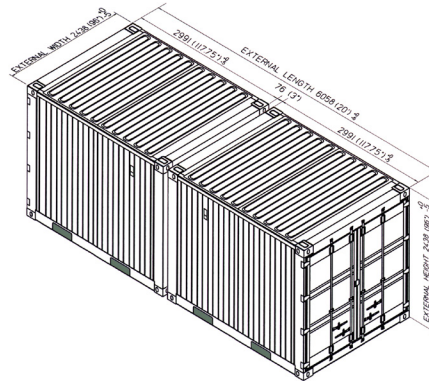

(2) Bicon Containers coupled together to form (1) 20' ISO module

PRODUCT FEATURES

STANDARD FEATURES

- LOWEST TARE WEIGHT and LARGEST CUBIC CAPACITY for any Bicon TYPE 2
- Full-width cargo doors on both ends of the container, (swing out a full 270 deg. for ease of loading)
- Steel Floor
- (4) way fork lift pockets
- (12) each floor level steel tie down lashing rings (12) each top side rail, steel, floor tie down lashing rings, all lashing rings are 4,000 lbs. cap. each (24) total
- (2) each Door sill, recessed floor tie down steel lashing rings, 2 per door 18" in, 4,000 lbs. cap. each (4) total
- (12) total vertical logistics tracks ("A" or "E" series)

- Vents, (2) each
- Military Standard 505B 33446 CARC TAN exterior paint

OPTIONAL FEATURES

- Full size shelving systems + 3 shoring and decking beams kit
- Connecting coupler storage bracket (1) each
- Document holder (2) each
- Rack & Cabinet systems
- Web Strap and Ratchet (SB3400)

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	9' 9 3/4"	9' 4 1/4"	8' 0"	7' 5 1/64"	8' 0"	7' 9 23/32"	7' 1 5/32"	7' 8 1/4"
Metric	2,991	2,851	2,438	2,261	2,438	2,381	2,163	2,343

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	3,626	22,834	26,460	542 Cu.Ft.
Kgs	1,644	10,357	12,001	15.3 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM