


Sea Box, Inc.®

CORPORATE OFFICE
 802 Industrial Hwy.
 East Riverton, NJ 08077-1910
 Tel: (856) 303-1101
 Fax: (856) 303-1501
www.seabox.com
 e-mail: sales@seabox.com

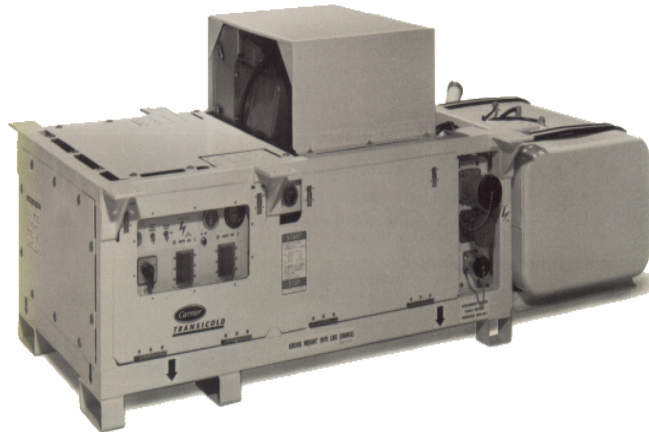

Generator Sets “Underslung” Type

The “underslung” generator set is designed to mount under the chassis trailer frame. The air cooled diesel generator can provide continuous (dual voltage) electrical power to intermodal refrigerated containers.

The unit is self contained with an integral 50 U.S. gallon (189 liter) fuel tank combined with the engine, generator, battery and all operating controls.

Dimensions			
Underslung	Length	Height	Depth
Ft. / In.	7' 1"	1' 11"	2' 11"
mm	2,159	584	889

Underslung	Tare w/out fuel	Tare w/fuel
Lbs.	1,500	1,975
Kg.	680	896

— FEATURES —

Power	15kW	18.7kva	(0.8p.f.)@ 1800 rpm
Output	12.5kW	15.6kva	(0.8p.f.)@ 1500 rpm
Voltage	230V @ 60Hz	180V @ 50Hz	
Output	460V @ 60Hz	380V @ 50Hz	

Engine

Deutz model F31-912 air cooled, three cylinder, 173 cubic inch (2836cc) displacement, four cycle engine 31.5 BHP continuous.

230V Receptacle 250VAC, 50 amps, Carrier P/N 22-01286-00 (Micpo P/N 1101-02)

230V Receptacle 250VAC, 60 amps, Carrier P/N 66U1-3863-1 (Micpo P/N 1102-01)

460V Receptacle CEE-17, 460VAC 32 amps Carrier P/N22-01561-00

230V Standard 50 amp plug -- 230V Standard 50 amp plug -- 460V Standard 32 amp plug

This unit is designed for quick fitting to nearly all standard ISO chassis trailers

PART # SB573