

Sea Box, Inc.®

CORPORATE OFFICE
 802 Industrial Hwy.
 East Riverton, NJ 08077-1910
 Tel: (856) 303-1101
 Fax: (856) 303-1501
www.seabox.com
 e-mail: sales@seabox.com



20' X 8' 0" Refrigerated ISO Cargo Container

20' Refrigerated	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Feet/Inches	19' 10 1/2"	14' 11 9/16"	8' 0"	6' 11 5/16"	8' 0"	7' 5 1/16"	6' 9 3/4"	7' 6 3/16"
Metric	6,058	5,461	2,438	2,116	2,438	2,260	2,077	2,290


20' Refrigerated	Tare Weight	Payload	Gross Weight	Cubic Capacity
Lbs.	6,920	45,990	52,910	922 Cu. Ft.
Kg.	3,140	20,860	24,000	26.12 Cu. M.

* All dimensions are average. Exact specifications for each model are available.

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARDS FOR 9 HIGH STACKING

— STANDARD FEATURES —

- ▶ Double swing doors with padlocks
- ▶ Air curtain
- ▶ Emergency escape hatch
- ▶ Forklift pockets (2 sets; 1 laden, 1 set special unladen)
- ▶ Aluminum T-grade floors
- ▶ 4 rows of "E" Track cargo restraint system along interior side walls of container (these may all be used for numerous tie downs)
- ▶ 6 cargo tie downs (along both wall in the floor)
- ▶ 6 cargo tie downs high up on both walls (24 total tie down)
- ▶ Interior electrical lighting system
- ▶ Access steps to non-slip roof
- ▶ Pressure relief port installed in rear cargo door panel
- ▶ Carrier refrigerated machinery features electrical supply as follows: 180/250, 360/500 Volts AC, 3 phase, 50/60hz cycle
- ▶ Temperature range from -22° F to +86° F

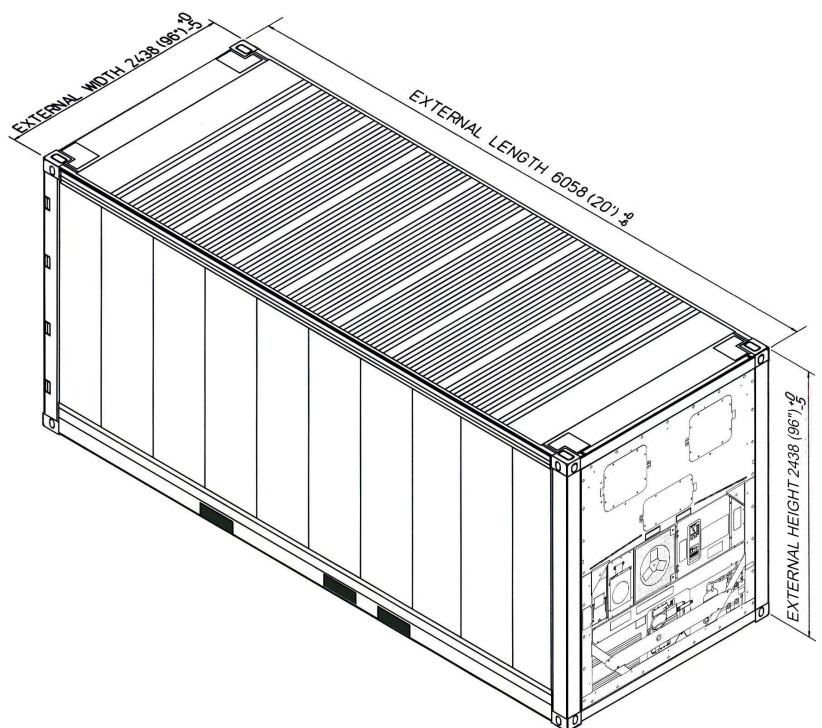

PART # SB541.0 LFRS