

Sea Box, Inc.®

CORPORATE OFFICE

802 Industrial Hwy.
 East Riverton, NJ 08077-1910
 Tel: (856) 303-1101
 Fax: (856) 303-1501
www.seabox.com
 e-mail: sales@seabox.com




CONTAINER REFRIGERATION UNIT

Specifications		
Temperature	Watts	Btu/hr
2° C (35° F)	10,260	35,000
-18° C (0° F)	6,008	20,000
-9° C (-20° F)	3,224	11,000

— FEATURES —

- ▶ Advanced Carrier 06D Reciprocating Semihermetic Compressor (41CFM)
- ▶ Zero-ODP HFC-134a
- ▶ Quick-Connect Dual Voltage Transformer
- ▶ System wired for either 190/230 volt or 380/460 volt, 3 phase, 50/60 Hz power
- ▶ 2 each, 60ft (18 meter) Power cables provided
- ▶ 560 P9W Plug on the 190/230 volt cable
- ▶ 530 P9W Plug on the 380/360 volt cable
- ▶ Main power circuit breaker
- ▶ ABS Certification
- ▶ Microlink III (ML3) microprocessor controller with power up and integral DataCORDER (365 days) for state-of-the art temperature control
- ▶ Industry-leading low air leakage: less than 0.14 CMH (5 CFH) at 50.8 mm (2 in.) W.g.
- ▶ Removable front service panels
- ▶ Forklift pockets to easily replace machines
- ▶ Document holder with waterproof door

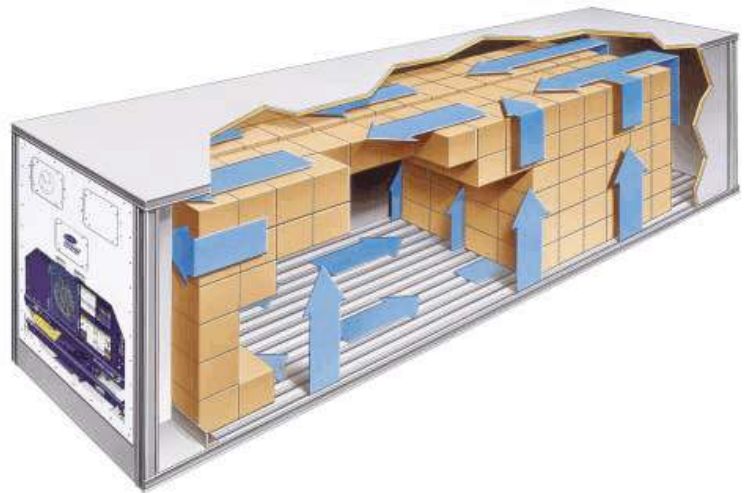

PART # SB574

ThinLINE MODEL # 69 NT 40.541.300 SERIES