

Sea Box, Inc.®



CORPORATE OFFICE
 802 Industrial Hwy.
 East Riverton, NJ 08077-1910
 Tel: (856) 303-1101
 Fax: (856) 303-1501
www.seabox.com
 e-mail: sales@seabox.com

Tricon Dry Freight ISO Cargo Container Double Doors Both Ends (TYPE V) Patent Pending

Tricon	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Feet/Inches	6' 5 1/2"	6' 4"	8' 0"	7' 4 15/16"	8' 0"	7' 8 11/64"	7' 1"	7' 8 11/64"
Metric	1,969	1,930	2,438	2,259	2,438	2,341	2,160	2,341

Tricon	Tare Weight	Payload	Gross Weight	Cubic Capacity
Lbs.	2,900	12,000	14,900	354 Cu. Ft.
Kg.	1,315	5,445	6,760	10.02 Cu. M.


— STANDARD FEATURES —

- ▶ **LOWEST TARE WEIGHT and LARGEST CUBIC CAPACITY** for any Type V Tricon
- ▶ Full-width cargo doors on both ends, (swing out a full 270° for ease of loading)
- ▶ (4) way fork lift pockets
- ▶ Wall tie down steel lashing rings, 4,000 lbs. cap. each (12 total)
- ▶ Door sill, recessed tie down steel lashing rings, 4,000 lbs. cap. each (4) total
- ▶ Adjustable shelving brackets (4) sets:
 - (8) vertical E-track sections total
 - (4) each transverse shelf, half, rated at 2,000 lbs. per half shelf
 - (8) each Shoring and Deck beams
- ▶ Connecting couplers, (3) per Tricon
- ▶ Connecting coupler storage bracket (1) each
- ▶ Vents, (2) each
- ▶ Customer's choice of standard exterior paint colors

— OPTIONAL FEATURES —

- ▶ Door corner post tie downs (20 total) = restraint system, shoring slot will support 2" x 6" lumber
- ▶ Document holder (2) each
- ▶ Rack & Cabinet systems

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARDS FOR 9 HIGH STACKING

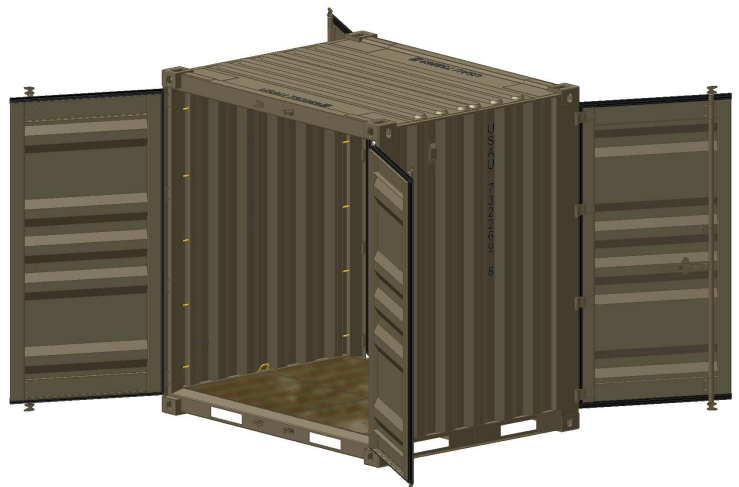

(3) Tricon Containers coupled together to form (1) 20' ISO module!

PART # SB825.0 SC 4TS