

40' x 8' 6" Dry Freight **ISO Cargo Container**




PRODUCT FEATURES

STANDARD FEATURES

- · Corrugated steel sides and roof
- · 14 gauge locking steel double end swing doors
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs. per 44 square inches
- · Wall tie down steel lashing rings, 6,000 lbs. cap. Each
- · Front corner post tie downs
- Door corner post tie downs = restraint system, shoring slot will support 2" x 6" lumber
- · Vents, (2) each

OPTIONAL FEATURES

- · Manifest Box, (2) each
- · Adjustable shelving brackets, (12) sets
- · Decking and shoring beams, (36) each

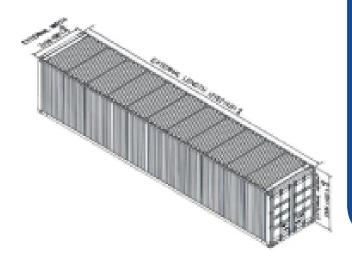

032114-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	40' 0"	39' 5 3/4"	8' 6"	7' 10 1/16"	8' 0"	7' 8 1/2"	7' 5 25/32"	7' 8 1/16"
Metric	12,192	12,033	2,591	2,289	2,438	2,350	2,280	2,338

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	8,060	59,140	67,200	2,386 Cu. Ft.
Kgs	3,655	26,825	30,480	67.6 Cu.M.

ISO 9001:2008





ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

Phone: 856 . 303 . 1101