





TRICON REFRIGERATED CARGO CONTAINER TYPE 1

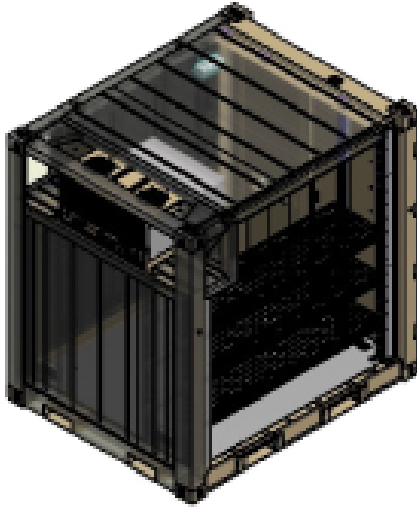

Isometric View
Wall Removed For
View of Interior

Isometric View
Wall Removed For
View of Interior

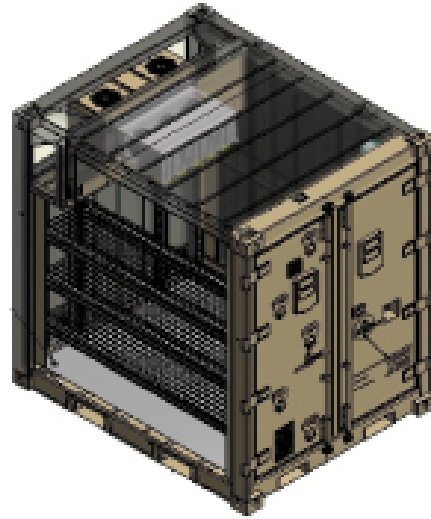

SB531-0-DND-TYPE1
Tricon Refrigerated Cargo Container

STANDARD FEATURES

- Double swing doors with grip handle and Stainless Steel hardware
- Stainless Steel interior lining per NSF standards
- Heavy duty tread plate aluminum floor
- Four way fork lift pockets
- MRU-TQ1-404 (Mainstream) Refrigeration Unit, 120 single phase, 60 cycle. Power SO cable is 10m long with Hubble Connector HBL320P4W
- Internal lighting, 120 VAC, 100 watt bulb
- Cargo restraint system with (12) tie down points, 1,000 lbs. cap.
- Horizontal E-Track, 1 row per side—recessed in side wall panel
- Connecting couplers, (3) per Tricon
- Technical Manual holder, (2) each Interior size: 12" x 9" x 1.5"
- Floor drain, (4) each with plugs
- Custom data plates
- Vertical E-Track in road side wall
- Vertical E-Track post, removable type to be used with SS shelves, (4) each
- Food Grade Stainless Steel shelving, removable open deck design, 22" wide, 600 lbs. capacity per shelf (5) shelves per side
- Web straps and ratchets, (3) per shelf

- Connecting coupler storage bracket, (1) each, holds (3) connectors
- Emergency escape hatch
- 6 KW Gen set, Diesel, with Hubble Receptacle HBL320P4W
- Strip Curtains in sliding track across door
- (5) folding steps/hand hold for roof access, plus (1) on the roof
- Non-slip roof surface
- Decking and shoring beams, (20) each
- 31-day recording thermostat
- 7.5 gal. fuel tank with quick connect supply & drain lines
- Additional 20 ft. extended supply & drain lines
- Single phase transformer
- 12V battery
- Enclosed, lockable & vented compartment for operating system

OPTIONAL FEATURES

- Spare parts kit
- Low Solar Absorption (LSA) coating

NSN #: 8145-01-601-0804

040115-R00

This Equipment is Intended for the Storage of Food in the Original Sealed Package Only.

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	6' 5 1/2"	5' 9 9/32"	8' 0"	6' 11 11/16"	8' 0"	7' 1/8"	6' 10 1/4"	5' 9 7/32"
Metric	1,969	1,760	2,438	2,126	2,438	2,137	2,089	1,758

	TARE WEIGHT w/ MACHINE	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY DRY FREIGHT	CUBIC CAPACITY REEFER CARGO	THERMAL LEAKAGE = U MAX @ 10°C MEAN TEMP
Lbs	5,100	4,900	10,000	293 Cu. Ft.	275.6 Cu. Ft.	7.98 Kcal/hr ° C
Kgs	2,313	2,223	4,536	8.3 Cu. M.	7.8 Cu. M.	6.4 Cu. M./hr @ 25.4 mm of WP

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY
MANAGEMENT SYSTEM