




## 40ft X 9ft 6in Insulated ISO Cargo Container

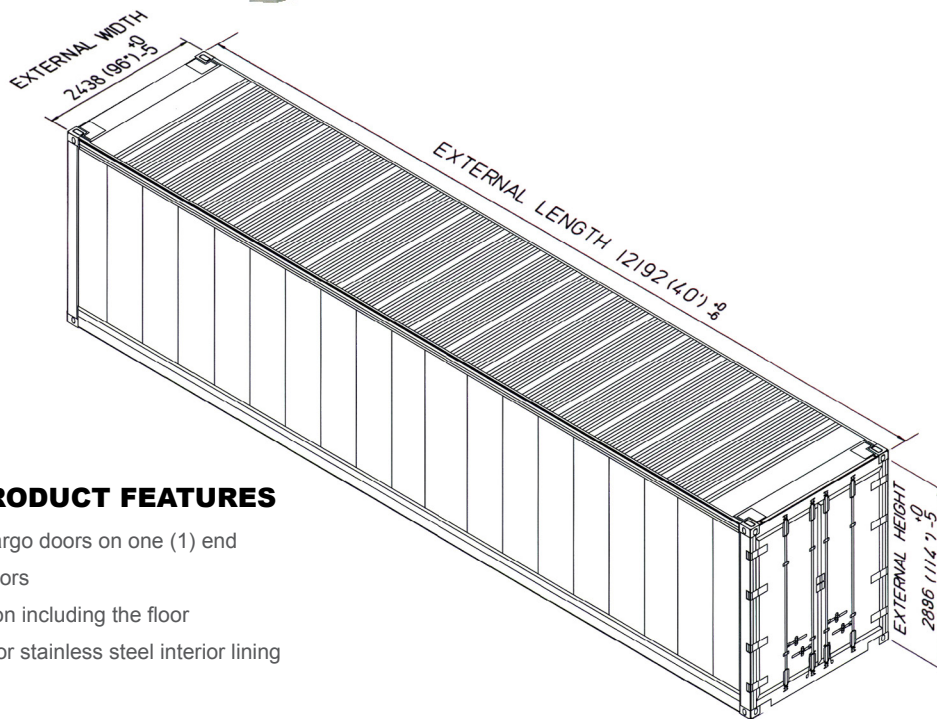

### STANDARD PRODUCT FEATURES

- Full opening swing cargo doors on one (1) end
- Aluminum T-grade floors
- 3" thick foam insulation including the floor
- Heavy gauge plastic or stainless steel interior lining

**ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD FOR NINE (9) HIGH STACKING**

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	40' 0"	39' 2 11/16"	9' 6"	8' 3 5/8"	8' 0"	7' 5 5/8"	8' 6 1/2"	7' 5 5/8"
Metric	12,192	11,955	2,896	2,531	2,438	2,276	2,603	2,276

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	7,610	59,590	67,200	2,430 Cu. Ft.
Kgs	3,450	27,030	30,480	68.9 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

**SB531.9**  
40ft X 9ft 6in Insulated ISO Cargo Container

000000-R00

ISO 9001:2008



CERTIFIED QUALITY  
MANAGEMENT SYSTEM