




SEA BOX[®]

40' X 9' 6" Refrigerated ISO Cargo Container

SB561.9
40' X 9' 6" Refrigerated
ISO Cargo Container

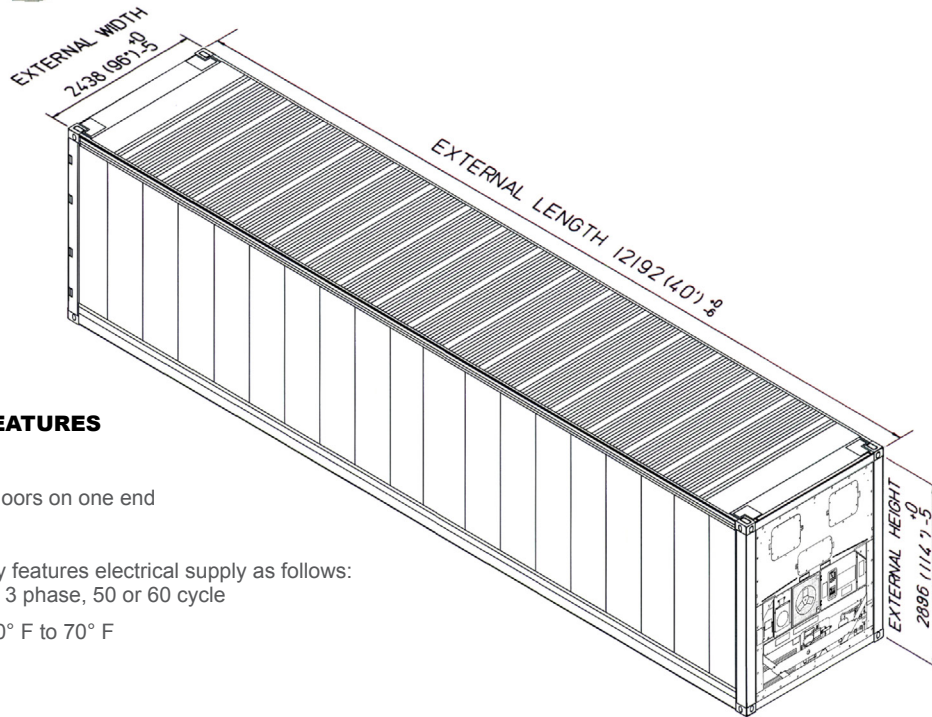

STANDARD PRODUCT FEATURES

- Aluminum, steel or sides
- Double full opening swing doors on one end
- Aluminum T-grade floors
- Most refrigerated machinery features electrical supply as follows:
208/230, 380/460 Volts AC, 3 phase, 50 or 60 cycle
- Temperature range from -20° F to 70° F

000000-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD FOR NINE (9) HIGH STACKING

| | LENGTH | | HEIGHT | | WIDTH | | DOOR OPENING | |
|--------|----------|------------|----------|-----------|----------|-----------|--------------|-----------|
| | Exterior | Interior | Exterior | Interior | Exterior | Interior | Height | Width |
| Ft in | 40' 0" | 38' 0 3/4" | 9' 6" | 8' 3 5/8" | 8' 0" | 7' 5 5/8" | 8' 6 1/2" | 7' 5 5/8" |
| Metric | 12,192 | 11,602 | 2,896 | 2,531 | 2,438 | 2,276 | 2,603 | 2,276 |

| | TARE WEIGHT | PAYLOAD | GROSS WEIGHT | CUBIC CAPACITY |
|-----|-------------|---------|--------------|----------------|
| Lbs | 10,030 | 57,170 | 67,200 | 2,360 Cu. Ft. |
| Kgs | 4,550 | 25,930 | 30,480 | 66.8 Cu. M. |

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P
GSA Advantage![™]