





6" Swivel Polyurethane Caster

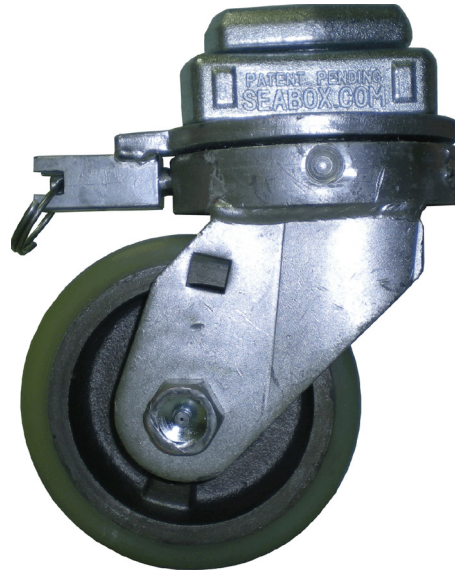

STANDARD FEATURES

- Connect to ISO container corner castings for rolling on warehouse floor
- Polyurethane over steel wheel, 6" diameter
- Rotates full 360 degrees, fully swivels
- (4) Position lock – North, South, East, or West
- Sea Box® low profile twistlock with no handle, welded in place
- Zinc plated finish
- 3/4" diameter axle bolt with locknut
- Zerk grease fitting in axle & raceway
- Capacity max working load 6,000 lbs./Caster
- Top plate and yoke drop forged steel

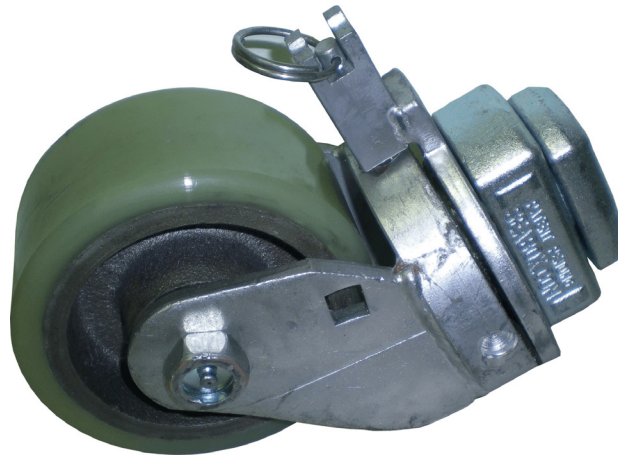

OPTIONAL FEATURES

- Wheel brake

NSN #: 5340-01-623-4536

	Wheel Diameter	Wheel Width	Box Ground Clearance with Caster	Assembly Weight
Ft in	6"	3"	9"	30 Lbs
Metric	152.4	76.2	228.6	13.6 kg

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

1 Sea Box Drive, East Riverton, NJ 08077-2022 | Phone: 856 . 303 . 1101 | Fax: 856 . 303 . 1501 | Email: parts@seabox.com

www.seabox.com

SB5906.DLA
6" Swivel Polyurethane Caster

021319-R00

ISO 9001



CERTIFIED QUALITY
MANAGEMENT SYSTEM