




10' X 8' Standard Dry Freight Bicon Container with Ramp

STANDARD FEATURES

- High security, fire resistant
- Heavy duty fully welded corrugated steel sides and roof
- 4mm steel floor for fire safety
- Fits inside 40' HC ISO container or trailer
- Double doors one end
- One lockable lever handle on primary door with emergency egress
- Two-point (top and bottom) spring latching system on secondary door
- Three-way forklift pockets
- Container numbering identification
- Tan color inside and out
- Outdoor 2000 Lux LED solar light with motion sensor over the entrance
- One-piece permanent ramp for convenience, SWL 800 lbs.
- Fits (4) 40" x 48" USPS pallets
- Door opening height 7'

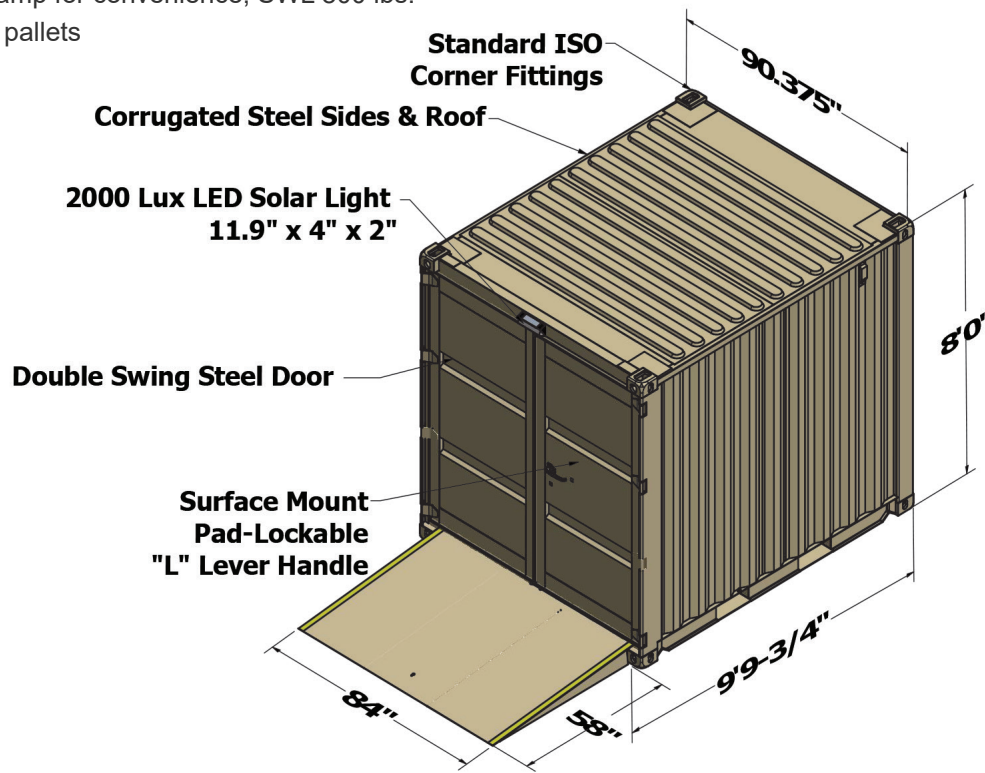

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	9' 9-3/4"	9' 5-3/8"	8' 0"	7' 4-11/16"	7' 6-3/8"	7' 4-5/16"	6' 10-3/4"	7' 2-1/2"
Metric	2991	2,880	2438	2,254	2,296	2,243	2,103	2,198

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	2,800	23,655	26,455	514 cubic ft
Kgs	1,270	10,730	12,000	14.56 cubic M

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

SB9211.0
10' X 8' Standard Dry Freight
Bicon Container with Ramp

020323-R00

ISO 9001



CERTIFIED QUALITY MANAGEMENT SYSTEM