




20ft X 8ft Refrigerated ISO Cargo Container



SB533-0
20ft X 8ft Refrigerated ISO Cargo Container

STANDARD PRODUCT FEATURES

- Aluminum, steel or sides
- Double full opening swing doors on one end
- Forklift pockets (on some 20' units)
- Aluminum T-grade floors
- Most refrigerated machinery features electrical supply as follows: 208/230, 380/460 Volts AC, 3 phase, 50 or 60 cycle
- Temperature range from -20°F to 70°F

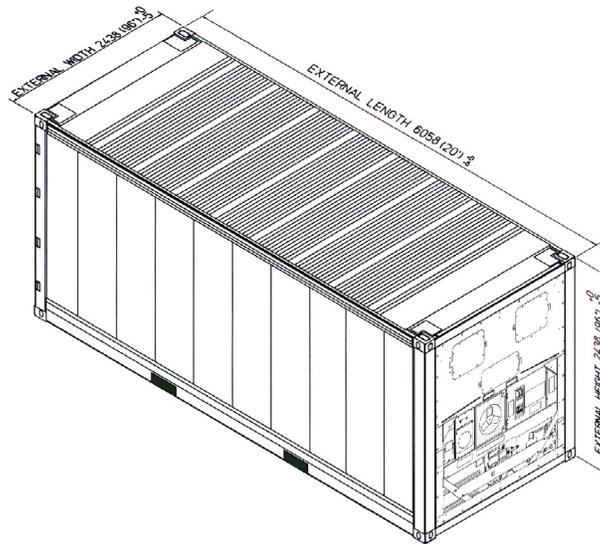

000000-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD FOR NINE (9) HIGH STACKING

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	17' 5 1/2"	8' 0"	6' 10 1/2"	8' 0"	7' 4"	6' 10 1/2"	7' 4"
Metric	6,058	5,321	2,438	2,096	2,438	2,235	2,096	2,235
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
Lbs	6,480		60,720		67,200		880 Cu. Ft.	
Kgs	2,940		27,540		30,480		24.9 Cu. M.	

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM