




Generator Set “Underslung” Type

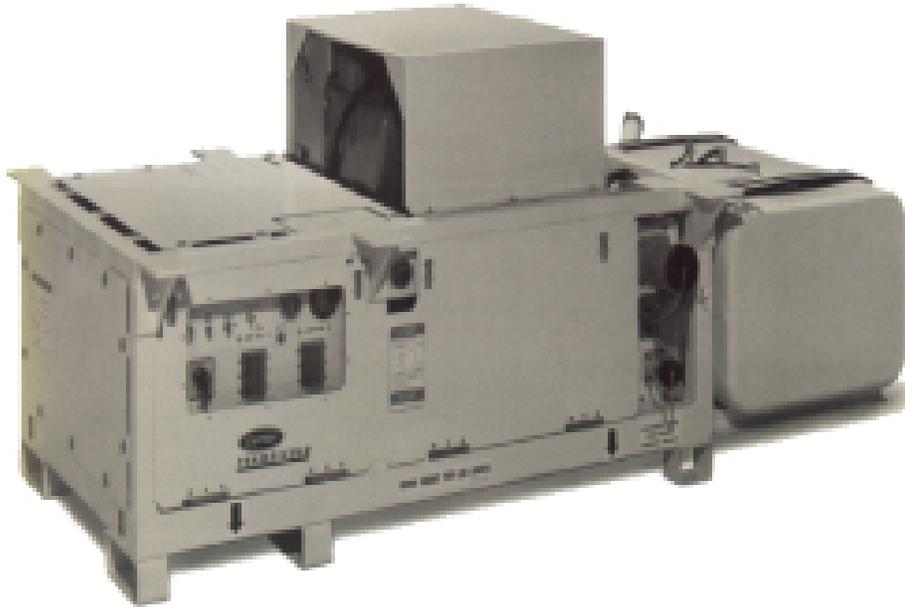

SB573
 Generator Set “Underslung” Type

STANDARD PRODUCT FEATURES

- The “underslung” generator set is designed to mount under the chassis trailer frame. The air cooled diesel generator can provide continuous (dual voltage) electrical power to intermodal refrigerated containers.
- The unit is self contained with an integral 50 U.S. gallon (189 liter) fuel tank combined with the engine, generator, battery and all operating controls.
- 230V Receptacle 250VAC, 50 amps, Carrier P/N 22-01286-00 (Micpo P/N 1101-02)
- 230V Receptacle 250VAC, 60 amps, Carrier P/N 66U1-3863-1 (Micpo P/N 1102-01)
- 460V Receptacle CEE-17, 460VAC 32 amps Carrier P/N 22-01561-00
- 230V Standard 50 amp plug - 230V Standard 50 amp plug - 460V Standard 32 amp plug
- This unit is designed for quick fitting to nearly all standard ISO chassis trailers

000000-R00

ISO 9001



CERTIFIED QUALITY
MANAGEMENT SYSTEM

DIMENSIONS				POWER OUTPUT	15kW - 18.7kva - (0.8p.f.) @ 1800 rpm	
	Length	Height	Depth		12.5kW - 15.6kva - (0.8p.f.) @ 1500 rpm	
Ft. in.	7' 1"	1' 11"	2' 11"	VOLTAGE OUTPUT	230V @ 60Hz - 180V @ 50Hz	
Metric	2,159	584	889		460V @ 60Hz - 380V @ 50Hz	
		Tare Weight without Fuel	Tare Weight with Fuel	ENGINE		
Lbs		1,500	1,975	Deutz model F31-912 air cooled, three cylinder, 173 cubic inch (2836cc) displacement, four cycle engine 31.5 BHP continuous.		
Kgs		680	896			

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS