


20' X 6' 6" High Open Top ISO Cargo Container with Ramp Door

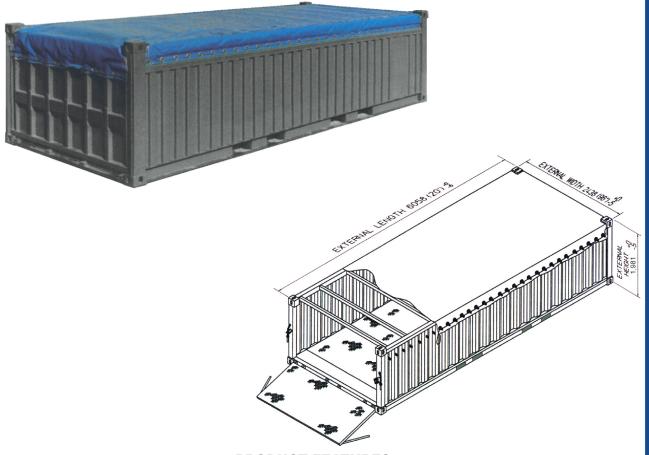

PRODUCT FEATURES

STANDARD FEATURES

- · 14 gauge corrugated steel sides
- · Heavy duty steel ramp door
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Tie down steel lashing rings, 4000 lbs. cap. each
- · (2) way laden fork lift pockets
- · Heavy duty tarp
- · Security roof tarp locking cable

OPTIONAL FEATURES

- 14 gauge locking steel double end swing doors
- · Heavy duty steel floor

091714-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARDS FOR NINE (9) HIGH STACKING

	LENGTH		HEIGHT		WIDTH		DOOR OPENING		TOP OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width	Length	Width
Ft in	19' 10 1/2"	19' 1/32"	6' 6"	5' 8 1/2"	8' 0"	7' 8 19/32"	5' 5 53/64"	6' 11 33/64"	18' 7 45/64"	7' 4 21/32"
Metric	6,058	5,894	1,981	1,740	2,438	2,352	1,672	2,114	5,682	2,252

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	4,920	47,990	52,910	851 Cu.Ft.
Kgs	2,230	21,770	24,000	24.1 Cu.M.

ISO 9001



GSA Advantage!

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS