




40' Workshop Shelter (Type 8)

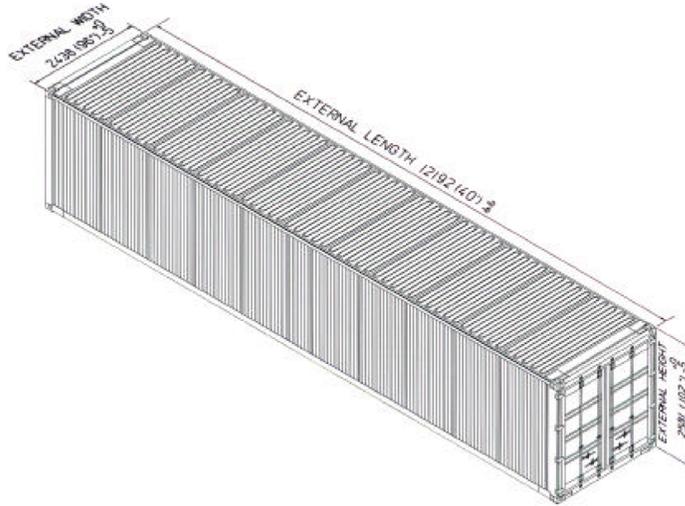

SB6416
40' Workshop Shelter (Type 8)

PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel sides and roof
- 14 gauge locking steel double end swing doors
- Tie-down steel lashing rings, 4000 lbs. cap. each
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs. per 44 square inches
- Vents, (2) each



022516-R01

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	40' 0"	39' 5 5/8"	8' 6"	7' 10 1/4"	8' 0"	7' 8 1/2"	7' 5 41/64"	7' 8 1/2"
Metric	12,192	12,030	2,591	2,394	2,438	2,350	2,277	2,350

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	12,400	54,800	67,200	2,390 Cu. Ft.
Kgs	5,623	24,857	30,480	67.7 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY
MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P
GSA Advantage!