




SEA BOX®

10' x 8' Bicon (TYPE 2) ISO Container Double Doors Both Ends

SB842.0
 10' X 8' Bicon (TYPE 2) ISO Container Double
 Doors Both Ends

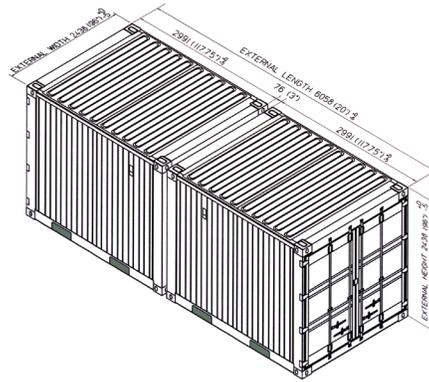

(2) Bicon Containers coupled together to form (1) 20' ISO module

PRODUCT FEATURES

STANDARD FEATURES

- LOWEST TARE WEIGHT and LARGEST CUBIC CAPACITY for any Bicon TYPE 2
- Full-width cargo doors on both ends of the container, (swing out a full 270 deg. for ease of loading)
- Steel Floor
- (4) way fork lift pockets
- (12) each floor level steel tie down lashing rings (12) each top side rail, steel, floor tie down lashing rings, all lashing rings are 4,000 lbs. cap. each (24) total
- (2) each Door sill, recessed floor tie down steel lashing rings, 2 per door 18" in, 4,000 lbs. cap. each (4) total
- (12) total vertical logistics tracks ("A" or "E" series)

- Vents, (2) each
- Green or Tan Exterior Paint

OPTIONAL FEATURES

- Full size shelving systems + 3 shoring and decking beams kit
- Connecting coupler storage bracket (1) each
- Document holder (2) each
- Rack & Cabinet systems
- Web Strap and Ratchet (SB3400)

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

SB842.0	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft. in.	9' 9 3/4"	9' 3 7/32"	8' 0"	7' 5 1/64"	8' 0"	7' 9 57/64"	7' 1 3/64"	7' 8 1/8"
Metric	2,991	2,825	2,438	2,261	2,438	2,385	2,160	2,340
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
Lbs.	3,370		23,090		26,460		538 Cu. Ft.	
Kgs.	1,530		10,470		12,000		15.23 Cu. M.	

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P
GSA Advantage!™