

Double Doors Both Ends (Type 2) 20' X 8' Dry Freight ISO Cargo Container




STANDARD FEATURES

- Corrugated steel sides, roof, and swing doors on both ends
- (2) sets of forklift pockets, laden and unladen
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Top and bottom wall tie down steel lashing rings, 4,000 lbs. cap. each (24 total) tested at 6,000 lbs.
- Each door corner post has (4) shoring slots to accommodate a 2" x 6" lumber restraint system
- · Vents, (2) each
- Military Standard 595B #34094 Standard Green or 595B #33446 Standard Tan exterior paint

OPTIONAL FEATURES

- · Manifest box (2) each
- Military Standard 595B #34094 CARC Green or 595B 33446 CARC Tan exterior paint

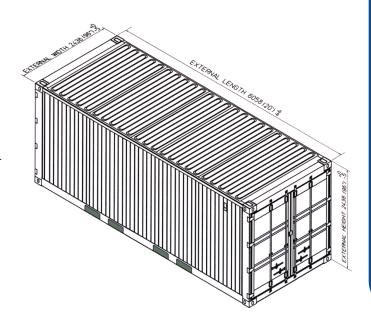

052521-R00

NSN # 8150-01-552-0728

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

SB862.0	LENGTH (+0/-6)		HEIGHT (+0/-5)		WIDTH (+0/-5)		DOOR OPENING (+0/-5)	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft. in.	19' 10 1/2"	19' 2 5/64"	8' 0"	7' 4 11/32"	8' 0"	7' 8 19/32"	7' 0"	7' 8 1/8"
Metric	6,058	5,844	2,438	2,244	2,438	2,352	2,134	2,340
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
Lbs.	4,850		62,350		67,200		1,090 Cu. Ft.	
Kgs.	2,200		28,280		30,480		30.83 Cu. M.	

ISO 9001





ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS