




## 20' x 8' Dry Freight ISO Container (Type 3) Double Doors on Both Ends and One Side

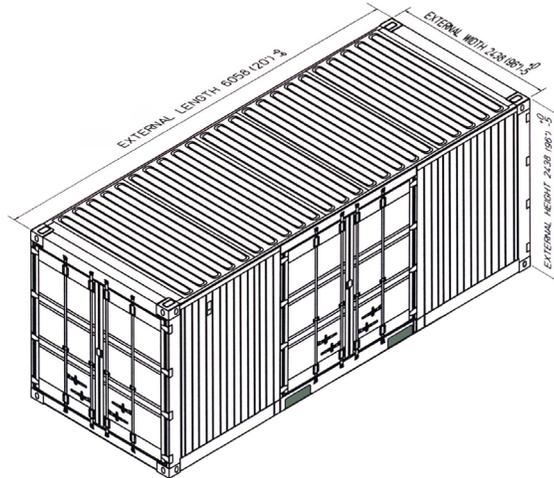

**SB863-0**  
20' x 8' Dry Freight ISO Container (Type 3)  
Double Doors on Both Ends and One Side

### PRODUCT FEATURES

#### STANDARD FEATURES

- Corrugated steel sides and roof
- 14 gauge locking steel double end swing doors on both ends and one side
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Top and bottom tie down steel lashing rings, 4000 lbs. cap each (20 total) tested at 6,000 lbs.
- Each door corner post has (4) shoring slots to accommodate a 2" x 6" lumber restraint system
- (2) sets of forklift pockets, laden and unladen
- Vents, (2) each
- Military Standard 595B #34094 Standard Green or 595B #33446 Standard Tan exterior paint

#### OPTIONAL FEATURES

- Military Standard 595B #34094 CARC Green or 595B #33446 CARC Tan exterior paint
- 2nd set of (2) way unladen fork lift pockets
- Manifest box (2) each
- Adjustable shelving brackets (6) sets

NSN #: 8150-01-491-2727

#### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

SB863.0	LENGTH		HEIGHT		WIDTH		DOOR OPENING		SIDE DOOR OPENINGS	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width	Height	Width
<b>Ft. in.</b>	19' 10 1/2"	19' 2 5/64"	8' 0"	7' 4 11/32"	8' 0"	7' 6 1/8"	7' 0"	7' 8 1/8"	7' 0 21/64"	7' 8 1/8"
<b>Metric</b>	6,058	5,844	2,438	2,244	2,438	2,289	2,134	2,340	2,142	2,340
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY			
<b>Lbs.</b>	5,510		61,690		67,200		1,060 Cu. Ft.			
<b>Kgs.</b>	2,500		27,980		30,480		30.0 Cu. M.			

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

020416-R01

ISO 9001



CERTIFIED QUALITY  
MANAGEMENT SYSTEM

GSA CONTRACT # GS-02F-0024P  
**Advantage!**