




SEA BOX®

One Full Side Opening and Double Doors One End 20' X 8'6" Dry Freight ISO Cargo Container

SB890-6
One Full Side Opening and Double Doors One End
20' X 8'6" Dry Freight ISO Cargo Container

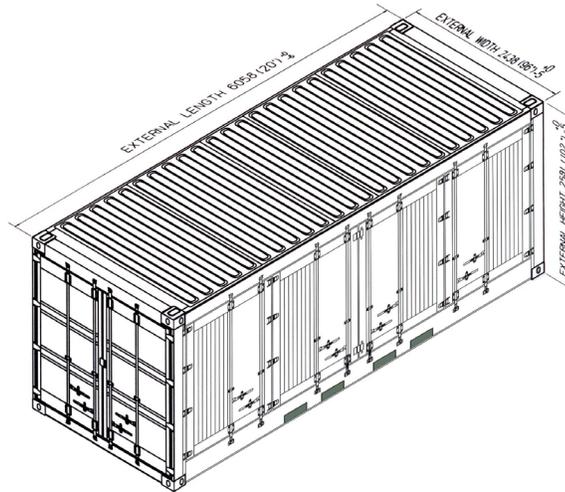

PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel (14 gauge) side, roof, and swing doors on (1) end and (1) double bifold swing side
- (2) sets of forklift pockets, laden and unladen
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- 10 (each) wall tie down steel lashing rings, 4,000 lbs. cap. each
- Front corner post tie downs

- Door corner post tie downs = restraint system, shoring slot will support 2" x 6" lumber
- (5) each floor recessed tie downs, 4,000 lb. cap. each
- Vents, (2) each

OPTIONAL FEATURES

- Steel Floors - 3/16" to 3/4"
- Manifest box (2) each
- Web strap and ratchet assemblies

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

SB890.6	LENGTH		HEIGHT		WIDTH		END DOOR OPENING		SIDE DOOR OPENINGS	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width	Height	Width
Ft. in.	19' 10 1/2"	19' 4 13/64"	8' 6"	7' 5 61/64"	8' 0"	7' 7 7/64"	7' 1 7/64"	7' 6 13/64"	7' 0 21/64"	19' 1 11/16"
Metric	6,058	5,898	2,591	2,285	2,438	2,314	2,162	2,291	2,162	5,834
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY			
Lbs.	6,613		46,297		52,910		1,091 Cu. Ft.			
Kgs.	3,000		21,000		24,000		30.9 Cu. M.			

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY
MANAGEMENT SYSTEM