




## Tricon Cargo Container Double Doors Both Sides (Type 2)

**SB822-0-S**  
Tricon Cargo Container  
Double Doors Both Sides (Type 2)

### PRODUCT FEATURES

#### STANDARD FEATURES

- Corrugated steel sides, roof and swing doors on both sides
- Heavy duty steel floor
- Four way fork lift pockets
- Wall tie down steel lashing rings, 4,000 lbs. cap. each (20) total
- Vents, (2) each
- Connecting couplers, (3) per Tricon
- Connecting coupler storage bracket, (1) each
- Adjustable shelving brackets, (5) sets: (10) vertical E-Track section total
- Manifest box, (2) each
- Military Standard 595B 34094 STANDARD GREEN or 595B 33446 STANDARD TAN exterior paint
- Technical Manual
- Performance purchase description # ATPD2298A

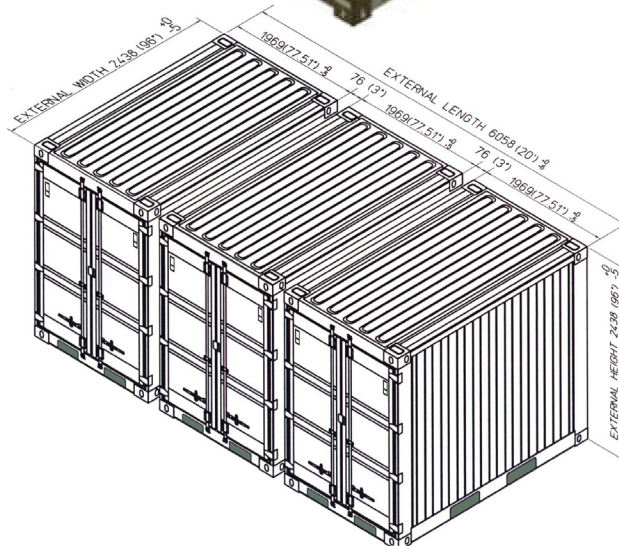

(3) TRICON CONTAINERS COUPLED TOGETHER TO FORM (1) 20' ISO MODULE

NSN #: 8145-01-528-7546

#### OPTIONAL FEATURES

- Decking and shoring beams
- Metal transverse shelves
- Storage cabinets
- Closeable vents
- Decompression vents
- 2" pipe coupling with plug for power entry
- Tie down fitting in E-Track, (8) each
- Tie down recessed in the floor, (4) each

122110-R00

### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	6' 5 1/2"	6' 4"	8' 0"	7' 4 5/8"	8' 0"	7' 6 9/16"	7' 3/4"	6' 1 5/8"
<b>Metric</b>	1,969	1,930	2,438	2,251	2,438	2,300	2,152	1,870

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	2,800	12,100	14,900	353 Cu. Ft.
<b>Kgs</b>	1,270	5,489	6,759	10.0 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY MANAGEMENT SYSTEM