




SEA BOX®

20' x 8' Dry Freight ISO Container (Type 3) Double Doors on Both Sides and One Side

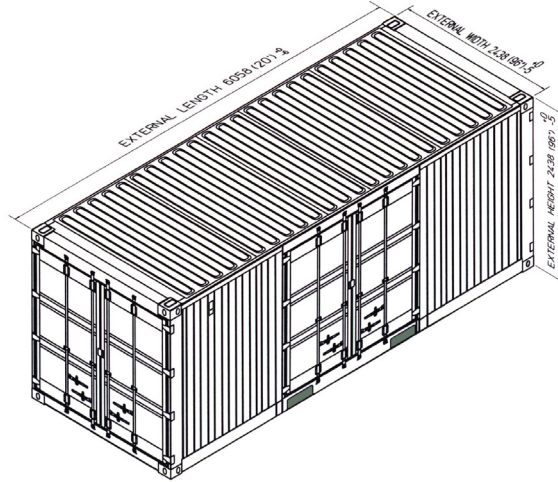

SB863-0
 20' x 8' Dry Freight ISO Container (Type 3)
 Double Doors on Both Sides and One Side

PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel sides and roof
- 14 gauge locking steel double end swing doors on Both Ends and One Side
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Top and bottom tie down steel lashing rings, 4000 lbs. cap each (20 total) tested at 6,000 lbs.
- Each door corner post has (4) shoring slots to accommodate a 2" x 6" lumber restraint system
- (2) sets of forklift pockets, laden and unladen
- Vents, (2) each
- Military Standard 595B #34094 STANDARD GREEN or 595B #33446 STANDARD TAN exterior paint

OPTIONAL FEATURES

- Military Standard 595B #34094 CARC GREEN or 595B #33446 CARC TAN exterior paint
- 2nd set of (2) way unladen fork lift pockets
- Manifest box (2) each
- Adjustable shelving brackets (6) sets

NSN # XXXX-XX-XXX-XXXX

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 4 3/16"	8' 0"	7' 4 3/16"	8' 0"	7' 5 1/16"	6' 11 5/8"	7' 8 1/2"
Metric	6,058	5,898	2,438	2,240	2,438	2,264	2,125	2,350

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	5,380	47,530	52,910	1,086 cu. ft.
Kgs	2,440	21,559	24,000	30.7cu. m.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

120511-R00

ISO 9001:2008



CERTIFIED QUALITY MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P
GSA Advantage!