




20' x 8' 6" Dry Freight ISO Cargo Container Double Doors on Both Ends

SB865-6
20' x 8' 6" Dry Freight ISO Cargo Container
Double Doors on Both Ends

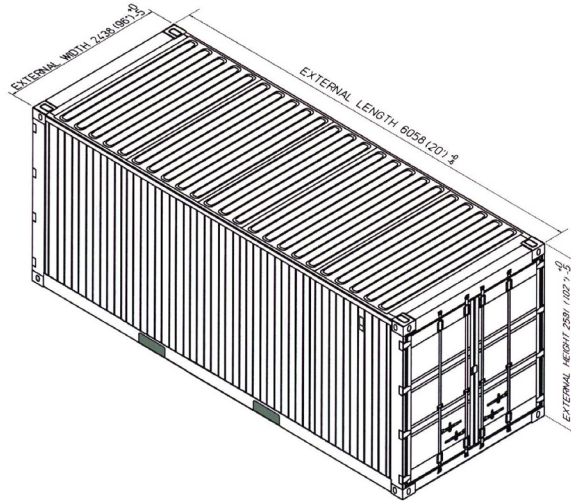

PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel sides, roof + swing doors on both ends
- (2) way laden forklift pockets
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Wall tie down steel lashing rings, 6,000 lbs. cap. each (24 total)
- Door corner post tie downs (20 total) = restraint system, shoring slot will support 2" x 6" lumber

- Floor recessed tie downs (10 total)
- Vents, (2) each

OPTIONAL FEATURES

- Manifest box (2) each
- 2nd set unladen forklift pockets
- 383 Green exterior CARC paint

083109-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft in	19' 10 1/2"	19' 2 1/16"	8' 6"	7' 10 1/4"	8' 0"	7' 8 1/2"	7' 5 5/8"	7' 8 1/8"
Metric	6,058	5,844	2,591	2,394	2,438	2,350	2,276	2,340

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	5,450	47,460	52,910	1,161 cu. ft.
Kgs	2,472	21,528	24,000	32.8 cu. m.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY
MANAGEMENT SYSTEM