




## 20' x 8' 6" Dry Freight ISO Cargo Container Double Doors on Both Ends

**SB865-6-ST**  
20' x 8' 6" Dry Freight ISO Cargo Container  
Double Doors on Both Ends

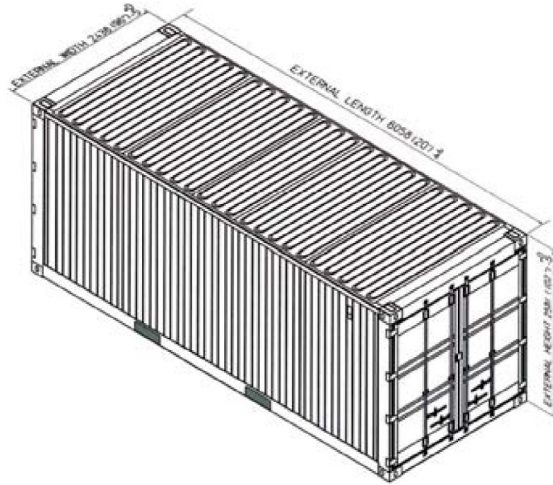

### PRODUCT FEATURES

- Corrugated steel sides, roof + swing doors on both ends
- (2) way laden forklift pockets
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Wall tie down steel lashing rings, 6,000 lbs. cap. each (24 total)
- Door corner post tie downs (20 total) = restraint system, shoring slot will support 2" x 6" lumber
- Floor recessed tie downs (10 total)
- Vents, (2) each
- Manifest box (2) each
- Military Standard 595B 33446 STANDARD TAN exterior paint
- Technical Manual

102010-R00

### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	19' 10 1/2"	19' 2 1/16"	8' 6"	7' 10 1/4"	8' 0"	7' 8 1/2"	7' 5 5/8"	7' 8 1/8"
<b>Metric</b>	6,058	5,844	2,591	2,394	2,438	2,350	2,276	2,340

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	5,450	47,460	52,910	1,161 cu. ft.
<b>Kgs</b>	2,472	21,528	24,000	32.8 cu. m.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001:2008



CERTIFIED QUALITY  
MANAGEMENT SYSTEM