

Sea Box, Inc.

CORPORATE OFFICE
 802 Industrial Hwy.
 East Riverton, NJ 08077-1910
 Tel: (856) 303-1101
 Fax: (856) 303-1501
www.seabox.com
 e-mail: sales@seabox.com



One Full Side Opening & Double Doors One End 20' X 8'6" Dry Freight ISO Cargo Container

Side Door Opening	
Height	Width
7' 0 29/64"	18' 5"
2,145	5,613

20' Double Doors One End & Full Side	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Feet/Inches	19' 10 1/2"	19' 4 11/16"	8' 6"	7' 5 3/16"	8' 0"	7' 6 1/16"	7' 0 5/16"	7' 5 9/16"
Metric	6,058	5,897	2,591	2,265	2,438	2,287	2,142	2,275

20' Double Doors One End & Full Side	Tare Weight	Payload	Gross Weight	Cubic Capacity
Lbs.	6,740	46,170	52,910	1,079 Cu. Ft.
Kg.	3,057	20,943	24,000	30.6 Cu. M.


ALL NEW CONTAINERS ARE MANUFACTURED TO
 THE LATEST ISO STANDARDS: ISO 668, ISO 6346, ISO 1161, and ISO 1496-1

— STANDARD FEATURES —

- ▶ Corrugated steel (14 gauge) side, roof + swing doors on (1) end and (1) double bifold swing side doors
- ▶ (2) sets of forklift pockets, laden and unladen, capable for use of 13k and 25k forklifts
- ▶ 1 1/8" thick marine wood floors, forklift tested to 16,000 lbs per 44 square inches
- ▶ Wall tie down steel lashing rings, 6,000 lbs. cap. each
- ▶ (10) each fixed lashing points located on the top and bottom rails of the back wall
- ▶ (4) each recessed tie down rings in the floor on the side opening door side, rated at 4,000 lb each (minimum)
- ▶ Vents, (2) each

— OPTIONAL FEATURES —

- ▶ Manifest box (2) each
- ▶ 383 Green exterior CARC paint

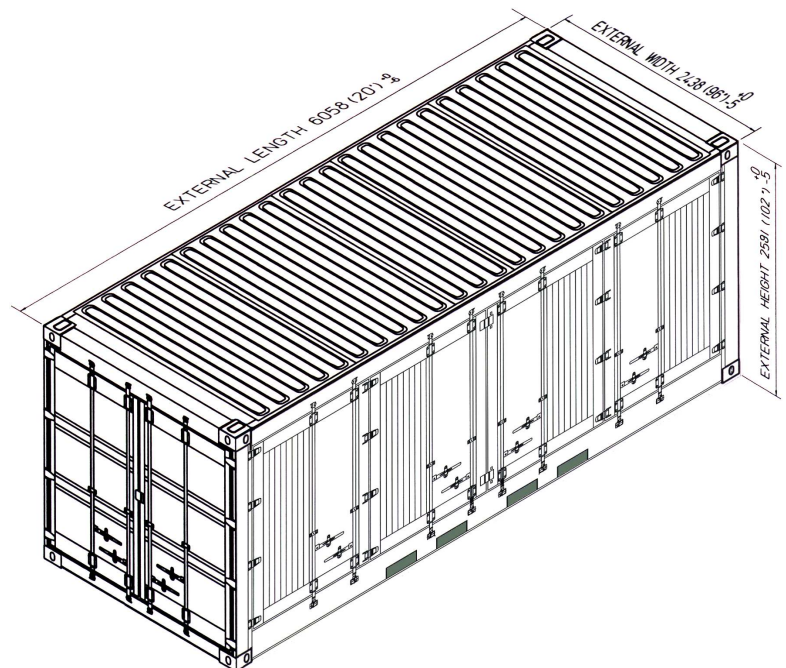

PART # SB890.6