


Sea Box, Inc.

CORPORATE OFFICE

802 Industrial Hwy.
 East Riverton, NJ 08077-1910
 Tel: (856) 303-1101
 Fax: (856) 303-1501
www.seabox.com
 e-mail: sales@seabox.com

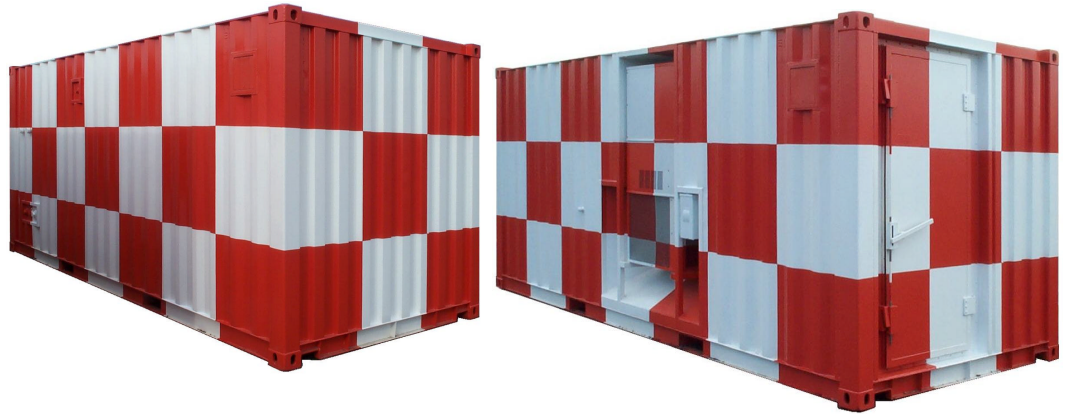

20' EMI Radar Shelter


20' EMI SHELTER	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
FEET / INCHES	19' 10 1/2"	19' 4 3/16"	8' 6"	7' 9 f "	8' 0"	7' 8 1/2"	7' 5 e "	7' 8 1/2"
METRIC	6058	5898	2591	2385	2438	2350	2277	2350

20' EMI SHELTER	Tare Weight	Payload	Gross Weight	Cubic Capacity
LBS.	8,850	44,060	52,910	1167 CU.FT.
KG	4014	19986	24000	33 CU.M.

ALL NEW CONTAINERS ARE MANUFACTURED
 TO THE LATEST ISO STANDARDS.

— STANDARD FEATURES —

- ▼ Corrugated steel sides, and roof
- ▼ 14 gauge locking steel double end swing doors
- ▼ 1C" thick marine wood floors, forklift tested to 16,000 lbs per 44 square inches
- ▼ Smooth steel floor surface over wood floor
- ▼ Tie down steel lashing rings, 4000 lbs. cap. each
- ▼ (2) way laden fork lift pockets
- ▼ Continuous welded enclosure
- ▼ EMI gaskets or filters on all openings
- ▼ EMI man door on rear
- ▼ HVAC recessed into side wall

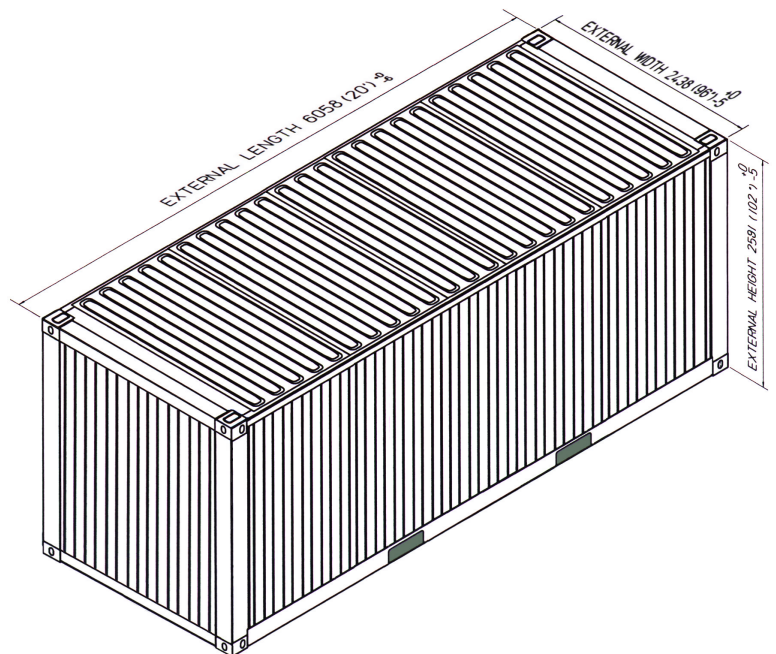

PART # SB3883