

Sea Box, Inc.®

CORPORATE OFFICE
 802 Industrial Hwy.
 East Riverton, NJ 08077-1910
 Tel: (856) 303-1101
 Fax: (856) 303-1501
www.seabox.com
 e-mail: sales@seabox.com



10' X 8' Bicon (TYPE 2) ISO Container Double Doors Both Ends

Bicon	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Feet/Inches	9' 9 3/4"	9' 4 1/4"	8' 0"	7' 5 1/64"	8' 0"	7' 9 23/32"	7' 1 5/32"	7' 8 1/4"
Metric	2,991	2,851	2,438	2,261	2,438	2,381	2,163	2,343
Bicon	Tare Weight		Payload		Gross Weight		Cubic Capacity	
Lbs.	3,626		22,834		26,460		542 CU.FT.	
Kg.	1,644		10,357		12,001		15.3 CU.M.	

— STANDARD FEATURES —

- ▶ **LOWEST TARE WEIGHT and LARGEST CUBIC CAPACITY** for any Bicon TYPE 2
- ▶ Full-width cargo access doors on both ends of the container, (swing out a full 270° for ease of loading)
- ▶ (4) way fork lift pockets
- ▶ (12) each floor level steel tie down lashing rings
- ▶ (12) each top side rail, steel, floor tie down lashing rings, all lashing rings are 4,000 lbs. cap. each (24) total
- ▶ (2) each Door sill, recessed floor tie down steel lashing rings, 2 per door 18" in, 4,000 lbs. cap. each (4) total
- ▶ (12) total vertical logistics tracks ("A" or "E" series)
- ▶ (1) Full size shelving system provides
- ▶ (4) each longitudinal shelf quarter, Non-Absorbing Composite shelves
- ▶ Each full size shelving system is rated at 2,000 lbs. cap.
- ▶ (6) each Shoring and Deck beams
- ▶ Connecting couplers, (2) per Bicon
- ▶ Connecting coupler storage bracket (1) each
- ▶ Vents, (2) each
- ▶ Lusterless Federal Standard Blue Color (35044)

— OPTIONAL FEATURES —

- ▶ Full size shelving systems + 3 shoring and decking beams kit
- ▶ Document holder (2) each
- ▶ Rack & Cabinet systems
- ▶ Web Strap and Ratchet (SB3400)
- ▶ Articulated Track Fittings with "D" Ring (SB3410)




Advantage!
www.gsaAdvantage.gov

CONTRACT # GS-02F-0024P

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARDS FOR 9 HIGH DRY FREIGHT CONTAINER, ALL CORTEN STEEL MONOCOQUE WELDED CONSTRUCTION

CONFORMING TO ISO 668 + 1496 CSC CERTIFIED

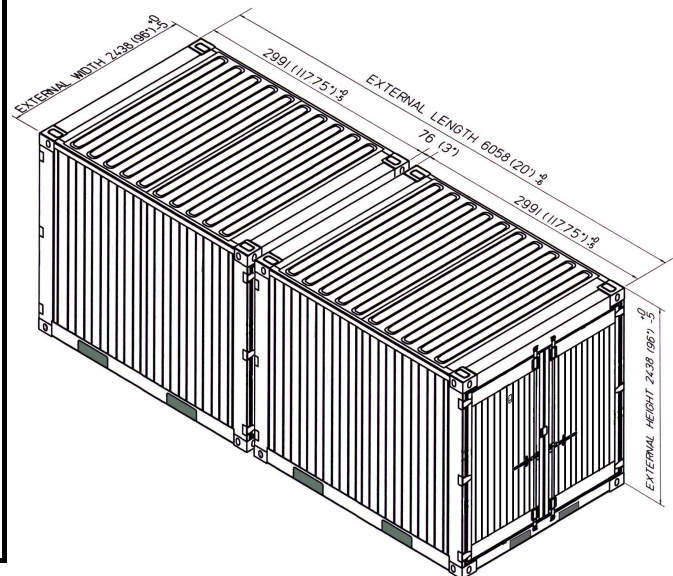

PART # SB842.0.SB.3LST.FTDR

NSN #: 8145-01-573-7424

(2) Bicon Containers can be coupled together to form (1) 20' ISO module!