




20' X 8' 6" Standard Dry Freight Container, Double Doors Both Ends and Double Side Doors

SB863-6
20' X 8' 6" Standard Dry Freight Container, Double Doors Both Ends and Double Side Doors

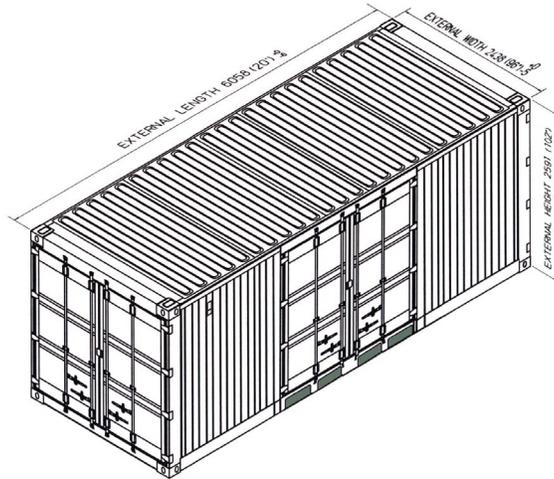

PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel sides and roof
- 14 gauge locking steel double end swing doors on both ends and one side
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Tie down steel lashing rings, 4000 lbs. cap each
- Two-way laden fork lift pockets
- Vents, (2) each

OPTIONAL FEATURES

- 2nd set of two-way unladen fork lift pockets
- Manifest box (2) each
- Adjustable shelving brackets (6) sets
- Decking and shoring beams (18) each

NSN #: 8150-01-514-8414

100322-R00

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING		SIDE DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width	Height	Width
Ft in	19' 10-1/2"	19' 4-3/16"	8' 6"	7' 10-3/16"	8' 0"	7' 5-1/16"	6' 11-5/8"	7' 8-1/2"	7' 5-3/4"	3' 10-7/16"
Metric	6,058	5,898	2,591	2392	2,438	2,264	2,125	2,350	2,280	2,350

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
Lbs	5,330	47,580	52,910	1,127 cu. ft.
Kgs	2,418	21,582	24,000	32 cu. m.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY MANAGEMENT SYSTEM